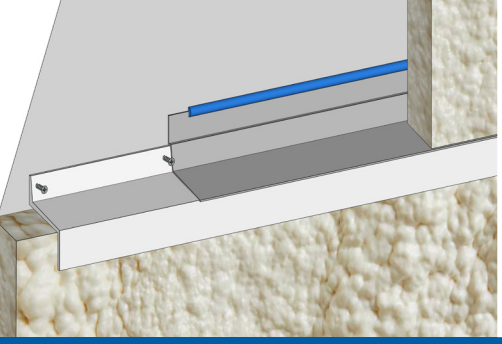

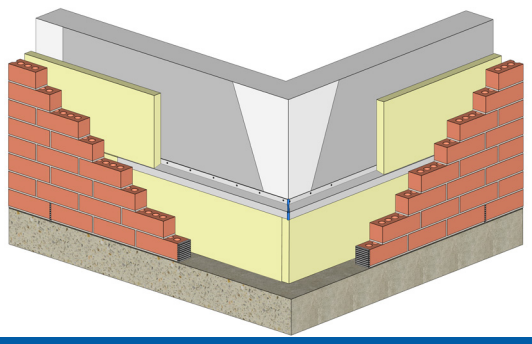

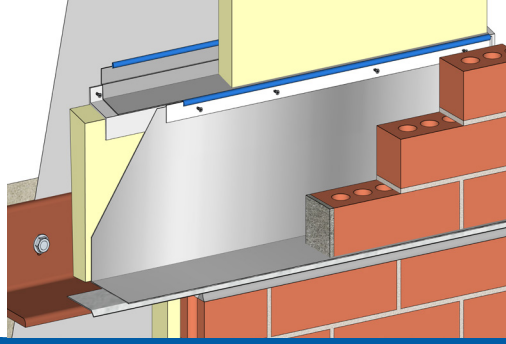

# Termination Bar Extender

## Key Properties

- The flashing extender reduces ***thermal bridging***
- Simplifies complex through-wall flashing (TWF) details at corners and end dams when the flashing is installed through the insulation
- 10 degree slope to promote drainage
- Allows for insulation (listed below) to be installed before the flashing system is installed
  - SPF spray foam
  - Polyisocyanurate foam panels
  - Extruded polystyrene (XPS)
  - Mineral wool
  - Wood fiber insulation
- One person installation
- The **Termination Bar Extender** is not to be used for structural purposes
- System components: **Termination Bar Extender**, **Max-Seal**, **Flat Termination Bar**, **UniverSeal US-100**, and choice of TWF

## Description

York's **Termination Bar Extender** is a thermally broken flashing extender that takes the complex geometry out of flashing, which simplifies the flashing installation.

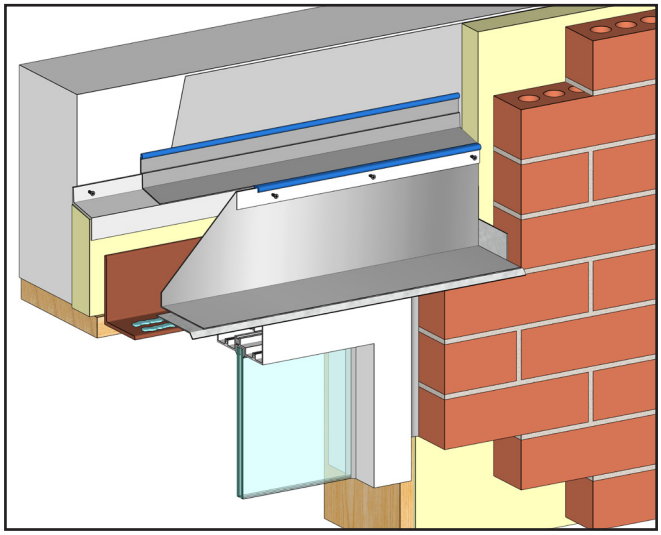

## 2" Extender

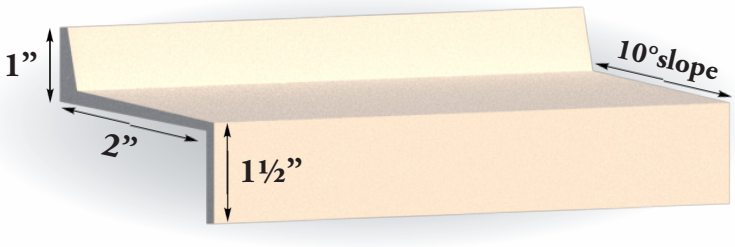


## 3" Extender

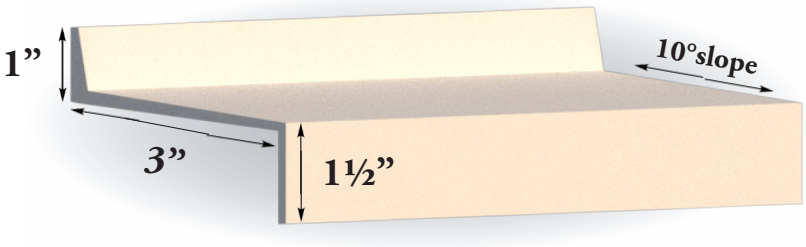


**Available in:**
**8' sections**
**80' per box (10 pieces)**

Visit www.yorkflashings.com for complete installation instructions, details & more.